


# K12 SYSTEM L 164 Drop down

With KIMANA hinges. Opening with handle.

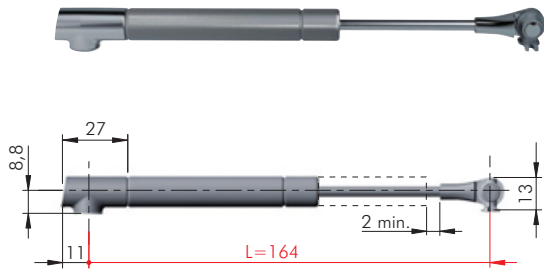


ZAnk EP ST

= 100 pcs.

48050200UZ

0



Rev. 01

| h   | Door weight (Kg) |         |   |         |   |         |         |   |   |    |    |
|-----|------------------|---------|---|---------|---|---------|---------|---|---|----|----|
|     | 1                | 2       | 3 | 4       | 5 | 6       | 7       | 8 | 9 | 10 | 11 |
| 200 | 1 x K12          | 2 x K12 |   | 3 x K12 |   |         | 4 x K12 |   |   |    |    |
| 250 | 1 x K12          | 2 x K12 |   | 3 x K12 |   | 4 x K12 |         |   |   |    |    |
| 300 | 1 x K12          | 2 x K12 |   | 3 x K12 |   | 4 x K12 |         |   |   |    |    |

These are experimental results to be checked by the customer. **In accordance with the actual European regulation, we suggest to use at least two stays for each door.** Our technical department is at your disposal to test further cases out of this chart.

### BRACKETS Ø15:

Magnet K Lock visible or invisible

The dimensions of the above drilling plan refer to carcasses which use **Kimana hinges**.

**VERY IMPORTANT:** for Kimana hinges at least 2 K12 System stays are required for any door width.

### SCREW FIXING BRACKETS:

For pistons quantity to be specified according to door size, refer to the chart for "K12 System 164 mm - DROP DOWN".

| X +    | Y +    | L1  |
|--------|--------|-----|
| 16 + 4 | 16 + 2 | 129 |
| 16 + 4 | 19     | 131 |
| 18 + 2 | 19     | 129 |
| 19     | 16 + 2 | 125 |
| 19     | 19     | 127 |
| 20     | 20     | 127 |

